

PATCHWORK BUM BAG / CROSS BODY BAG PATTERN

35CM X 18CM X 8CM APPROX



2
green
zebras

AUSTRALIAN DISTRIBUTOR

LIBERTY.
FABRICS

FABRIC REQUIREMENTS

BAG SIZE 35CM X 18CM X 8CM APPROX


Fabric SKU	Fabric SKU	INCHES	METRIC
	DV2040	FAT EIGHTH for back piece	25 X 55CM
	DV010	FAT QUARTER for lining	50CM x 55CM

A selection of Liberty fabrics for the front patchwork piecing, for example:


	03636014C	8"square	20.5 CM
	036300116B	8"square	20.5 CM
	036300125C	8"square	20.5 CM
	03632007C	8"square	20.5 CM
	03632019B	8"square	20.5 CM
	03632019Q	8"square	20.5 CM
	03636017A	8"square	20.5 CM
	03633152L-CC	8"square	20.5 CM
	03638020G	8"square	20.5 CM

For plain (non patchwork) bag version, use one fat quarter of chosen Liberty fabric for outer bag sections.

HABERDASHERY REQUIREMENTS




1 x 18" /45cm zipper of choice, double zipper or ring pull zipper



140cm webbing or bag strap

Bag hardware: D ring, swivel hook (optional) and slide buckle




High loft interfacing for front patchwork sections

CUTTING INSTRUCTIONS

FOR THE LINING (AND PLAIN FABRIC BAG IF NOT MAKING PATCHWORK VERSION)

Fold your fat quarter in half and cut your pattern pieces on the fold for lining.

1/4" SEAM ALLOWANCE INCLUDED.

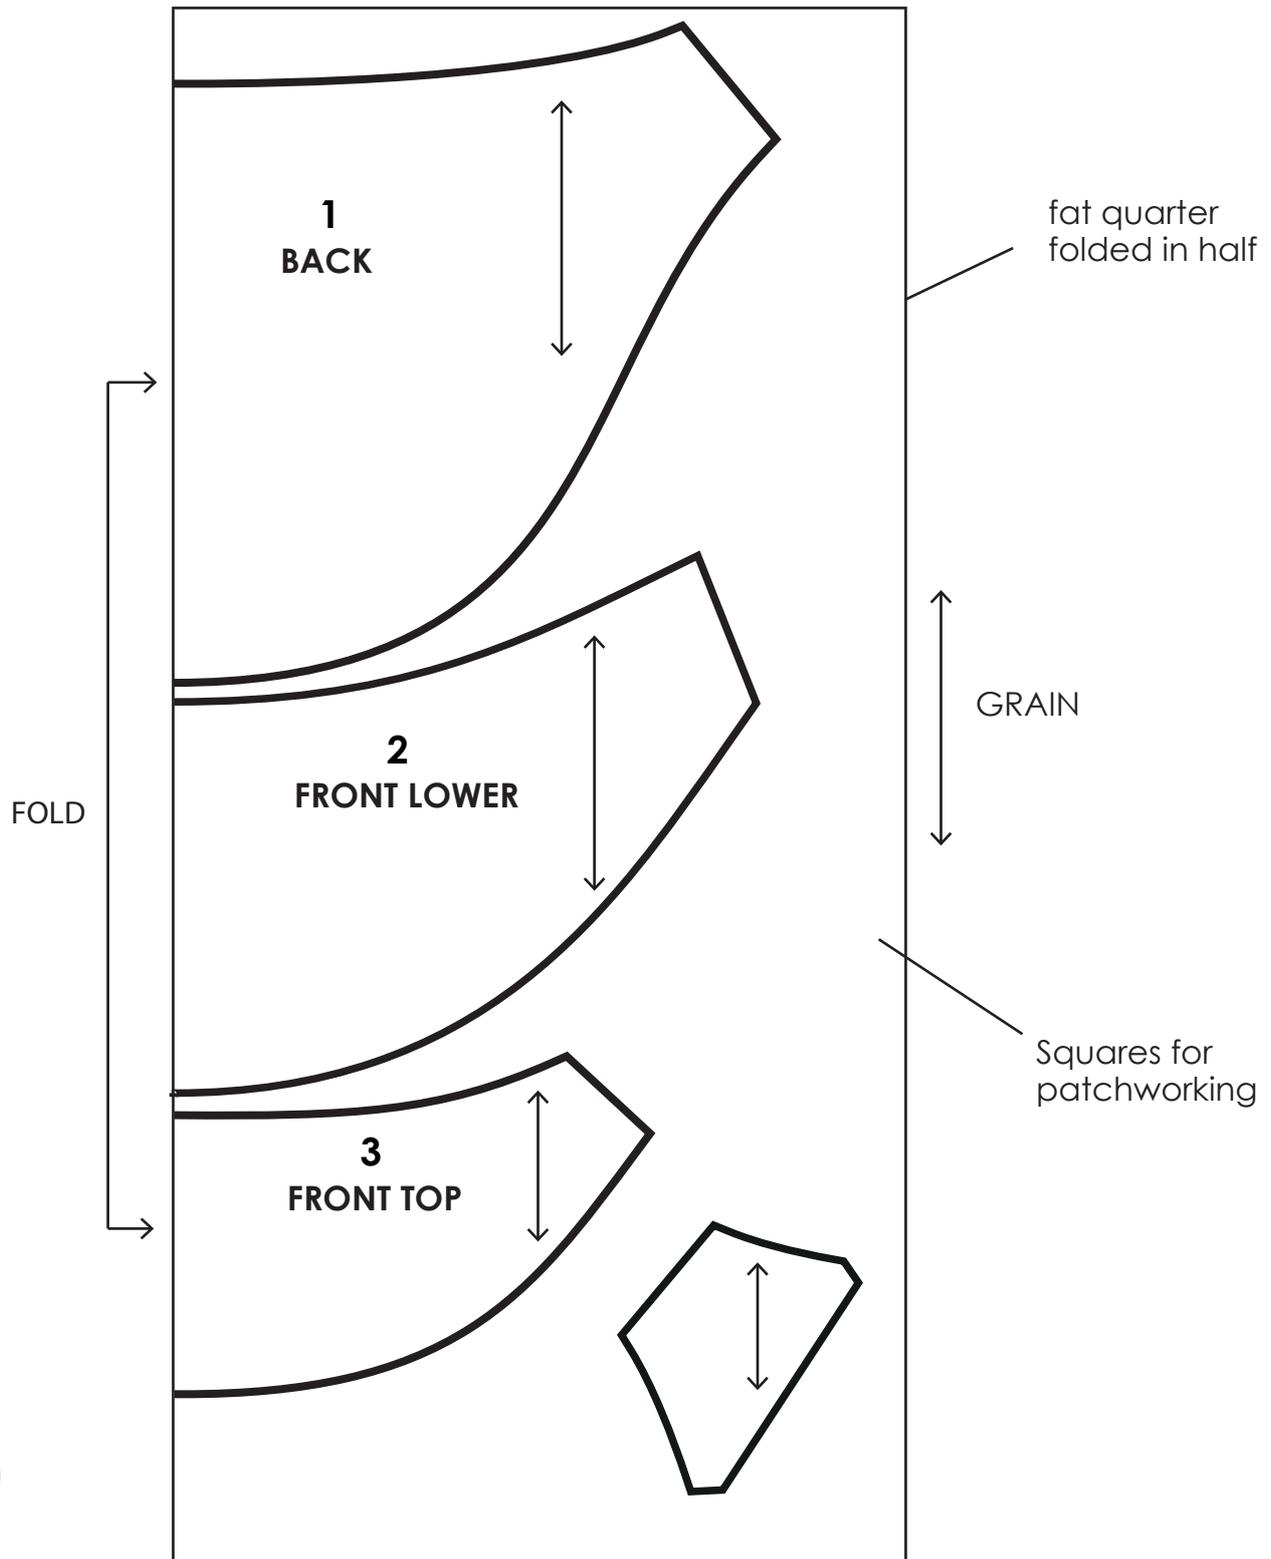


CUTTING INSTRUCTIONS

FOR THE PATCHWORK FRONT PIECES

From your selection of Liberty fabrics cut 48 2 ½" squares

Sew squares together in 6 rows of 8.

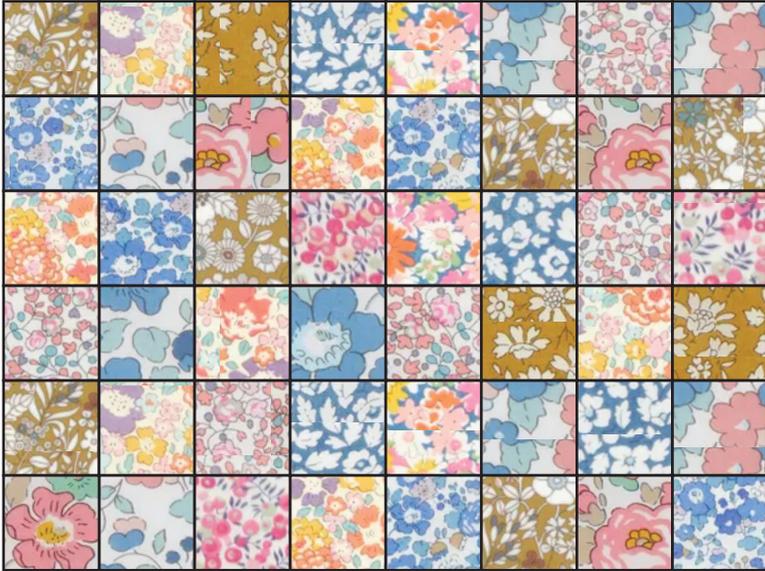

Fold your pieced fabric in half and place pattern pieces 2 and 3 only on the fold and fit your Tab piece in the lower corner. Cut your pattern pieces out.

Interfacing

In the same way cut pattern pieces from the interfacing and iron to the back of your pieced front sections.


PATTERN INSTRUCTIONS

FOR THE BACK OUTER PIECE

From the corduroy fat eighth, fold in half and cut:

1 x back outer piece.

.

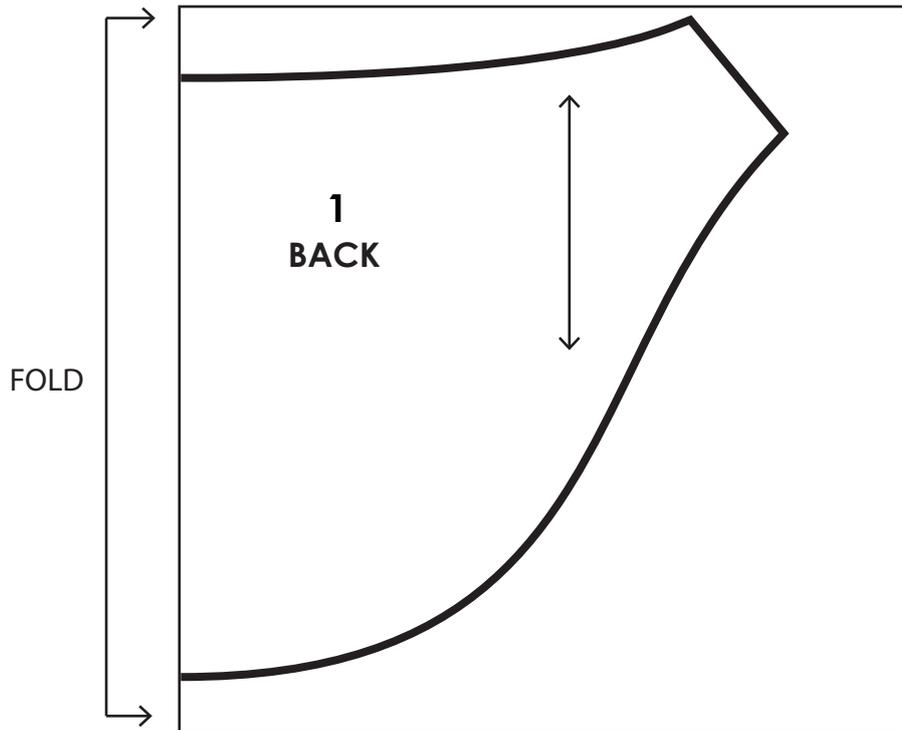

PATTERN INSTRUCTIONS


1 BACK

1 X OUTER PIECE
1 X LINING PIECE



ON FOLD



TEST SQUARE
1"

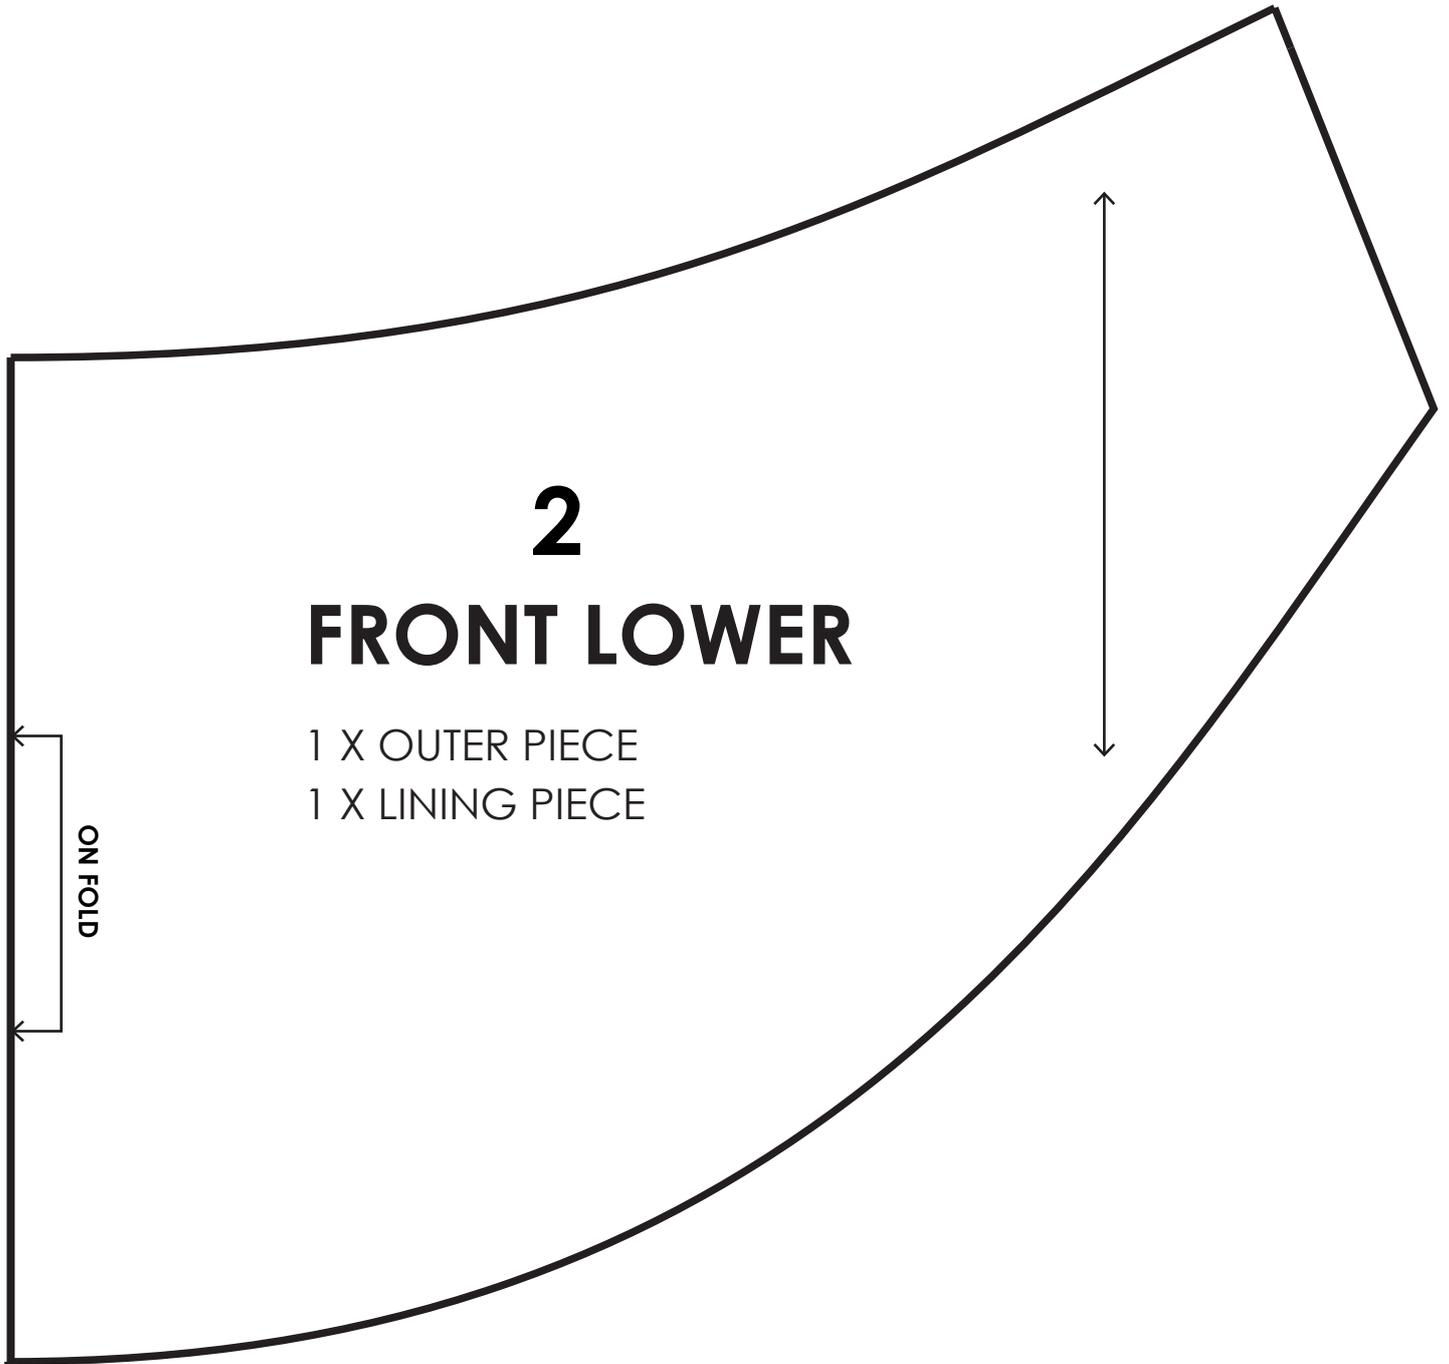


PATTERN INSTRUCTIONS

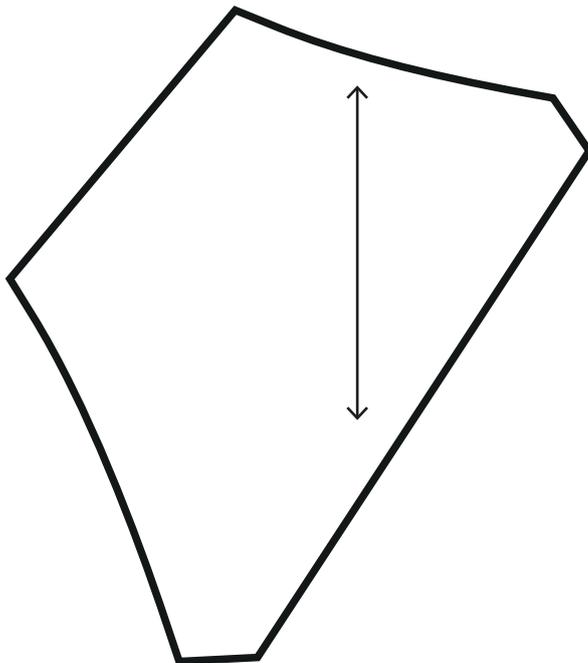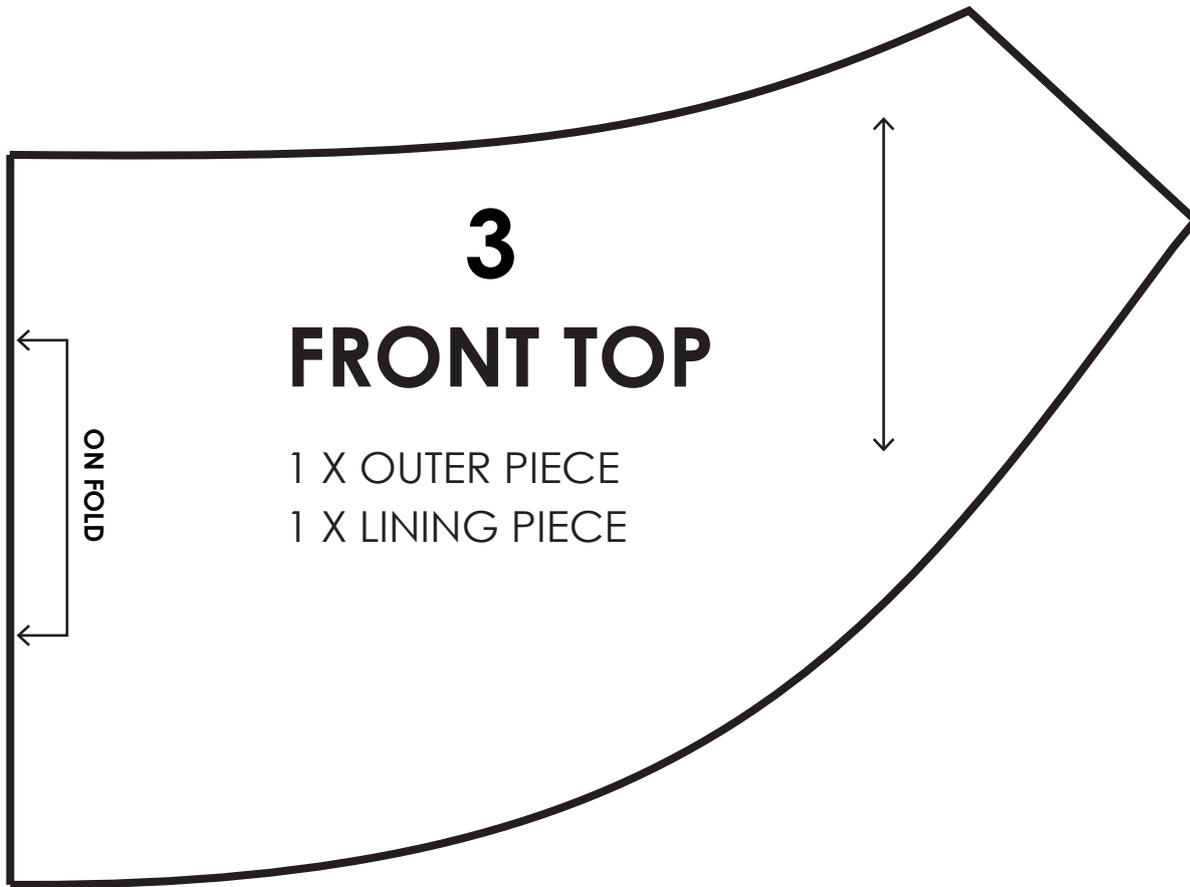

PATTERN INSTRUCTIONS

**Please read through the pattern instructions in full before you commence sewing.
1/4" seam allowance is used throughout, unless otherwise stated.**


Place centre marks in the middle of your front pieces and your zipper. Repeat for lining pieces.

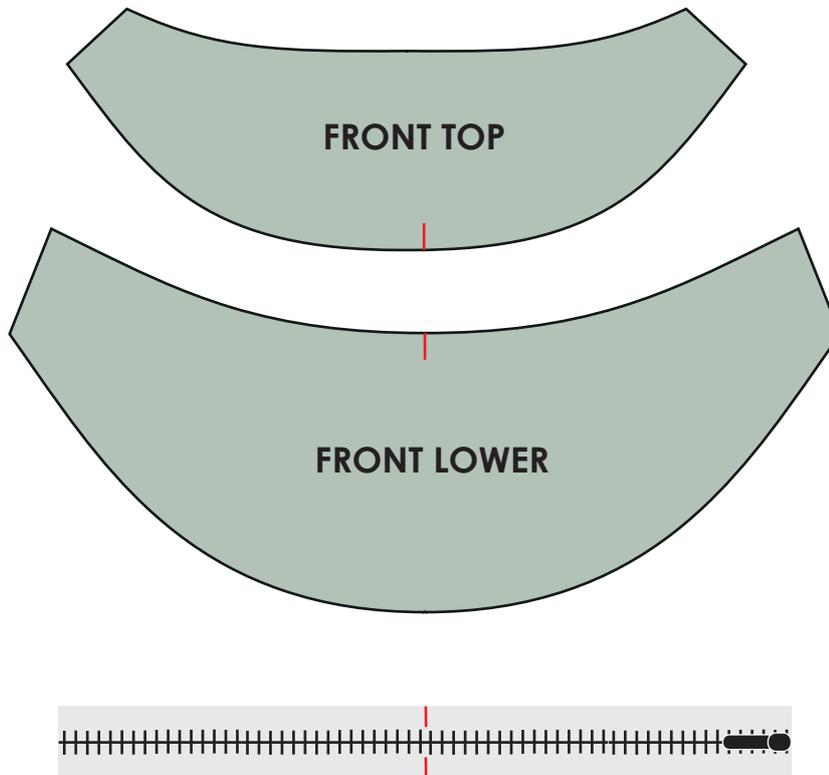

Place outer front lower piece face up and place zipper face down on top, lining up your marks.


Now place your front lower lining fabric face down on top, matching up your marks.

stitch the layers approx 1/4" away from the zip teeth.

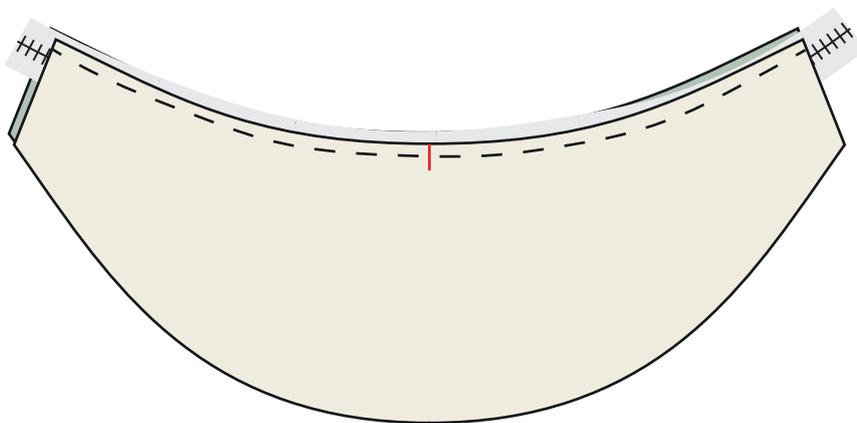

PATTERN INSTRUCTIONS

Turn outwards and press. Topstitch along the edge of the fabric to secure.

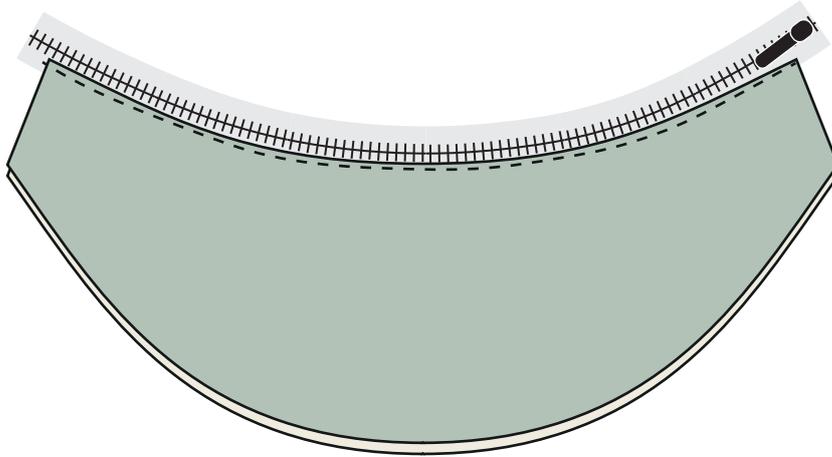


Repeat this process for the front top side.

Place the front top fabric face up on your worktop.

Place the fabric piece you have just sewn on top with the zipper facing down, lining up your marks. Place a pin to secure in place while you place the lining top piece on top face down, lining up your marks. Pin evenly in place around the curve pieces.

Stitch in place. Turn over and press, then topstitch along the edge to secure.


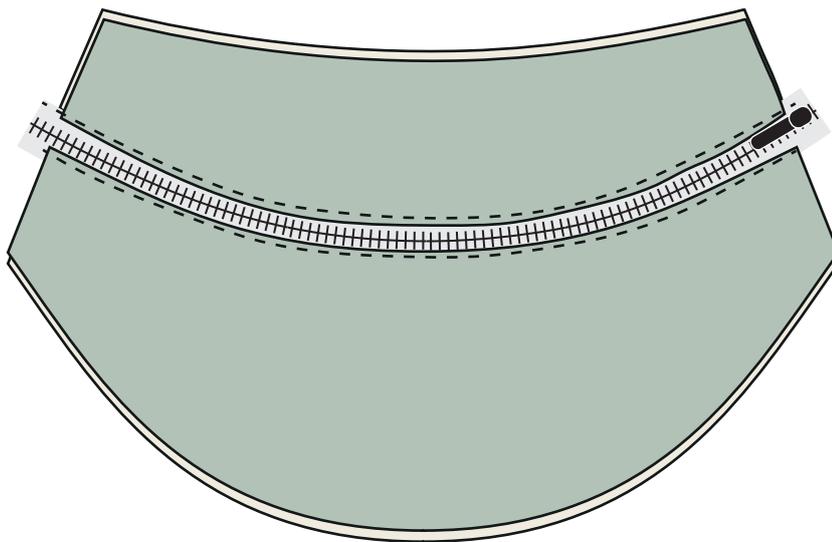


PATTERN INSTRUCTIONS

Next, with your zippered pieces section laying face up on your worktop, take your outer side tab pieces and place face down either side of your zippered pieced section. Place your lining side tab pieces right sides together on the lining side. Pin all layers in place.

Stitch together 1cm (3/4") from the edge, taking care when sewing over the zipper (you may need to turn your wheel slowly over the zipper teeth).

Move your zipper pull towards the middle of the zip and trim excess zipper ends. Tuck over and press.

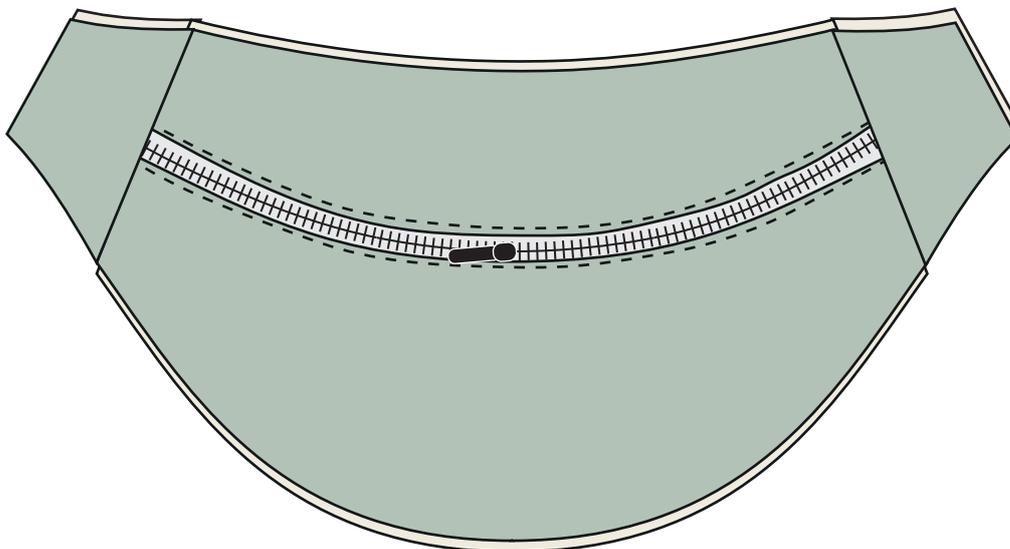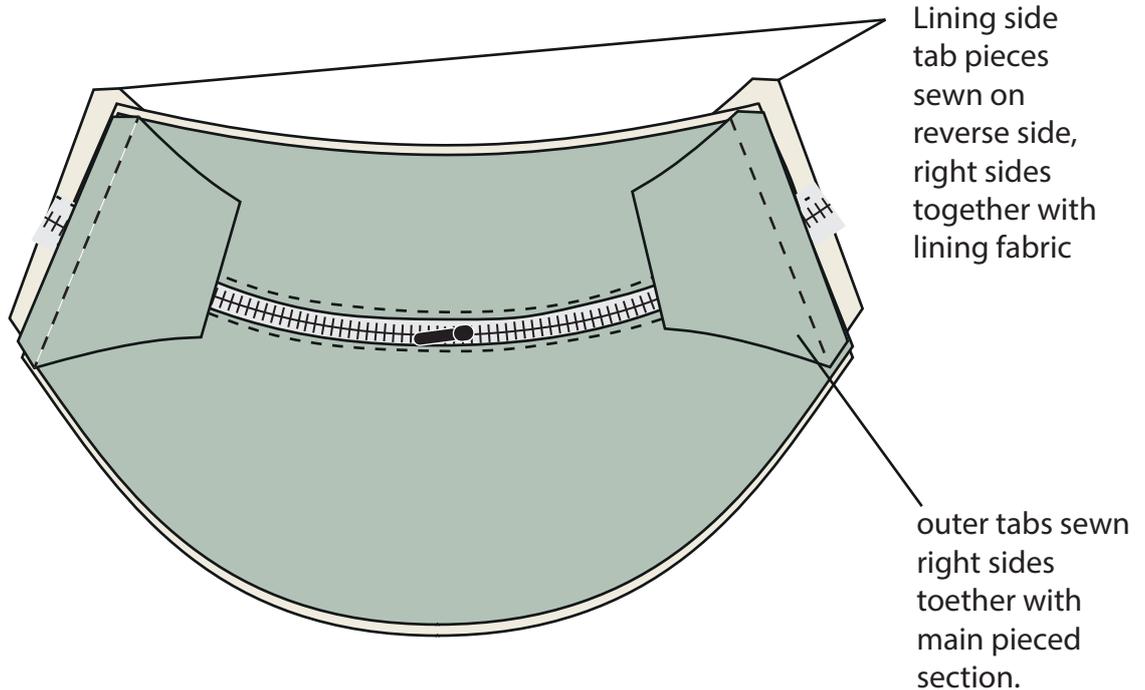


PATTERN INSTRUCTIONS

Cut one 10cm (4") piece of webbing and loop through your D ring. Sew to close loop.

If you have spare squares left over from piecing you can sew these together and add to your webbing strap as shown on the pattern cover.


Take the rest of your webbing (you may need to cut to desired length) and the d ring loop piece and pin to each side of your bag, not the lining. **Sew onto the outer tab sections only, do not sew the lining.**

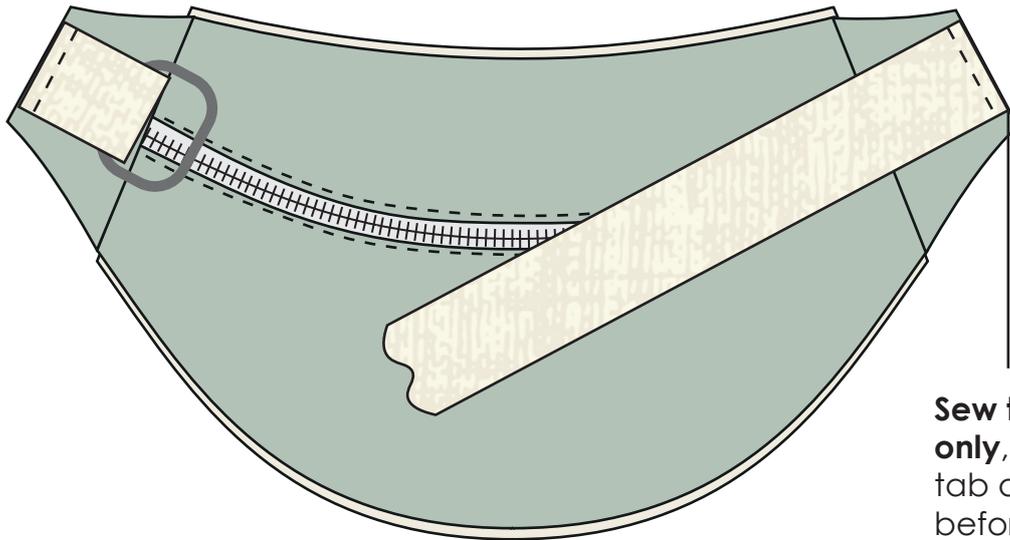

Sew to outer tab only, move lining tab out the way before sewing

Open your zipper to halfway.

Place back piece of bag right side up on worktop. Place your pieced zipper bag section face down on top. Line up the bag sections and pin the middle and side tabs to keep in place while you layer the back lining piece face down on top.

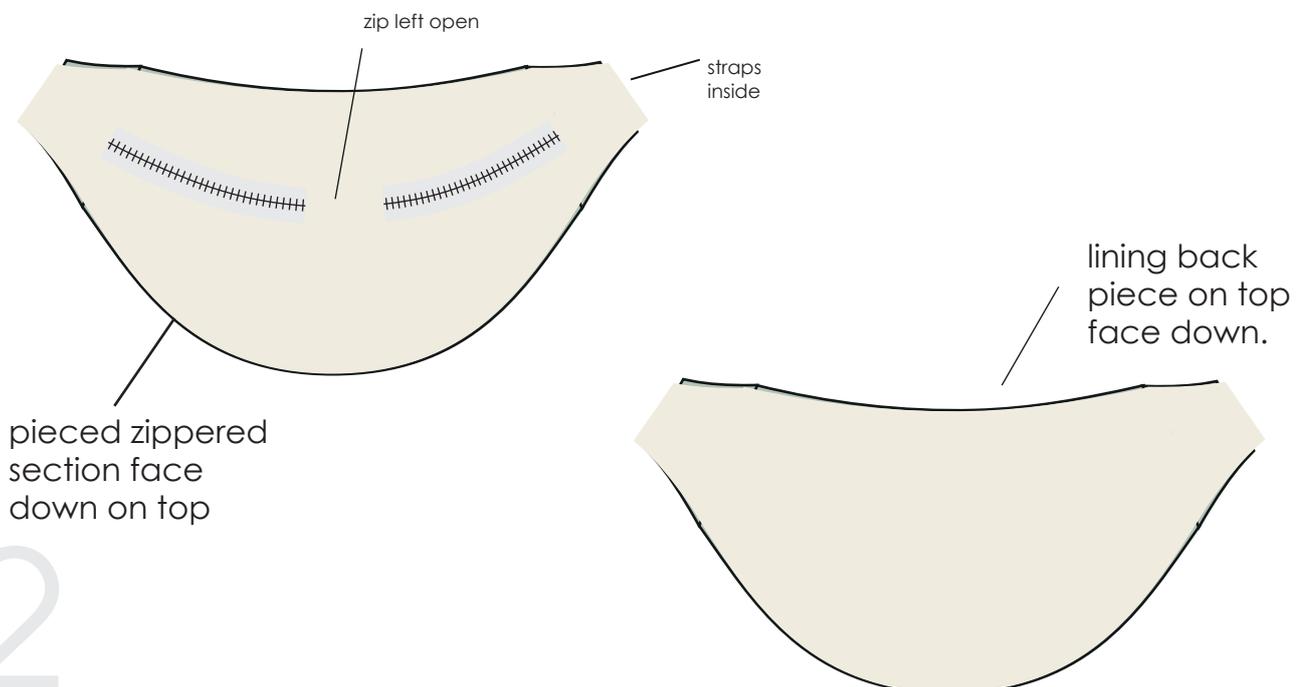


pieced zippered section face down on top

lining back piece on top face down.

PATTERN INSTRUCTIONS


Sew the layers together around the sides and bottom edge of your bag, taking care not to catch the long strap as you sew, leaving a gap of 1/4" each end.

Leave the top section unsewn.

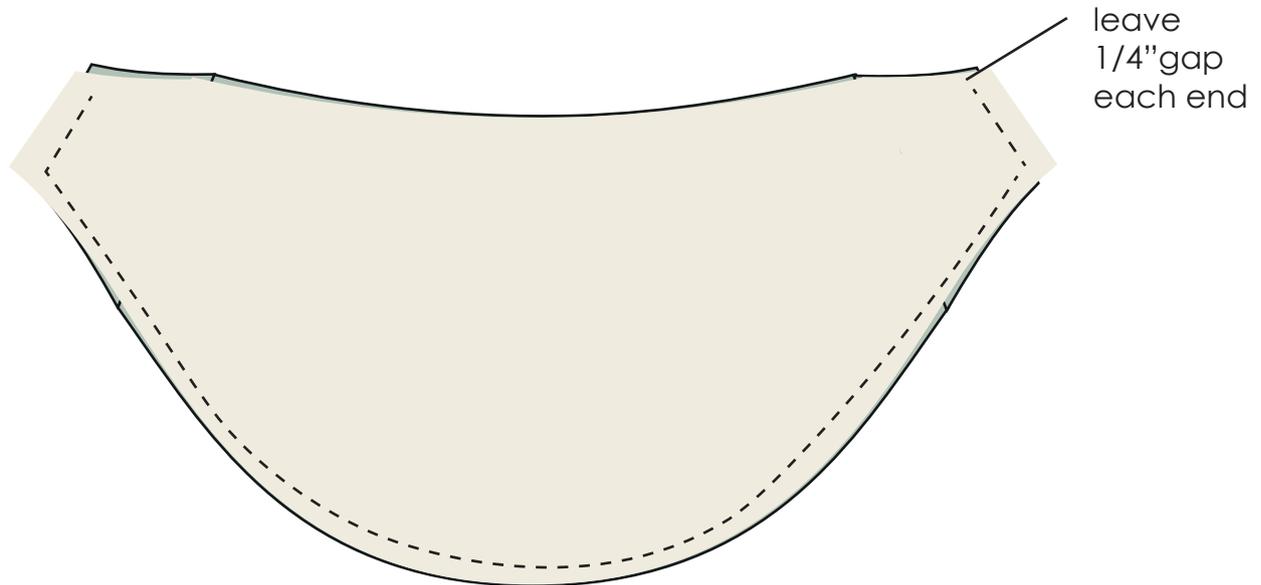

Sew the outer back piece to the zippered pieced section first, to close the 'lid' section of the bag. **Do not include the lining layer yet!**

Once done, repeat to sew the lining to secure all layers, leaving a gap of 4" (10cm) for turning.

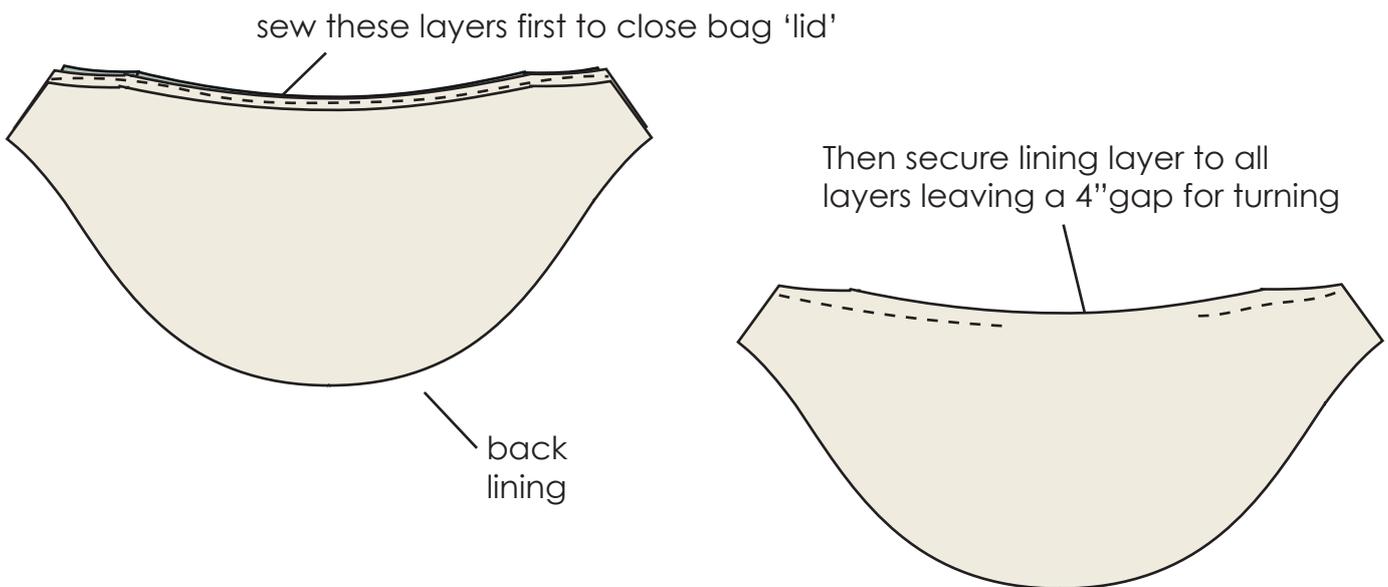

PATTERN INSTRUCTIONS

Trim any excess fabric on the corners and turn bag right side out through the gap left in the lining.

Hand or machine stitch the gap closed.

Add the slide buckle to your long strap section, keeping a long loop open so the buckle isn't secured tightly, then loop the strap through the D ring on the opposite side of the bag, OR through a swivel hook loop if using, then feed back through the slide buckle, fold over and stitch to secure with a reinforcing stitch.



2
green
zebras

Two Green Zebras
Worldwide Distributor of
Devonstone Collection

www.twogreenzebras.com
sales@twogreenzebras.com
[@2greenzebras](https://twitter.com/2greenzebras) [@devonstone_collection](https://twitter.com/devonstone_collection)

AUSTRALIAN DISTRIBUTOR
LIBERTY.
FABRICS